

Compu-Spread

CS-660/160 Advanced Spreader Controller



Multi-function programmable controller for granular, and or liquids as well as joystick applications in Snow and Ice Control.

Our controller can meet all winter road maintenance operations.

- **Standard Spreader:** Granular, Prewet, Gate
- **Anti-icing System:** 1 boom, and 3 boom control
- **Symmetry System:** Granular, Prewet, Anti-icing, Chute
- **Additional Functions:**
 - Spinner/Conveyor reverse,
 - Dual Channel Cross Conveyor
 - Dual-spinner, and Lane control
 - Air Gate Control
- **Joystick functions:**
 - Support up to 9 proportional functions
 - Multiple power floats with or without proximity sensor
 - Dump Limit protection with or without override
 - Low oil protection with or without override
 - Single and multi-axis safety interlock
 - Emergency raise spreader function interlock
- **Configurable intelligent inputs & light functions**
 - Up to 16 switches, 8 general purpose digital outputs
 - All inputs and outputs CAN bus connected
- **Multiple Profiles:** Up to 6 operation configurations



Reliable

- Comprehensive solution for fleet application
- Automotive grade with wide temp range
- Robust and compact design for mobile applications
- High Electromagnetic Compatibility (EMC)
- Inputs and outputs with fault detection



Connected

- CAN bus connected system control components
- WiFi data transfer
- Bluetooth & USB connections for data exchange and sensor support
- Serial communications for various mobile detector and Infrared temp sensors, GPS receiver
- Interface that allows AVL or IoT devices to monitor spreading activities in real time and retrieve spreading data for generating activity reports, remote analytics



Modular

- **Modular hardware:**
 - Display only, Integrated display
 - Smart IOs, Bodas RC28-14, Junction block
 - Joystick consoles with or without smart IOs
 - Standalone & Pendant Joystick console
 - CAN/sensor/valve cables
- **Modular functions:** Granular, Anti-icing, Joysticks, Smart IOs, parameter configuration and report package, IoT solution



Secure

- Program sequence monitoring watchdog
- Proprietary operating system, Rexroth security
- Data encryption and Certificate management

System Features

- High performance ultra-modern 32-bit TriCore technology
- Component of BODAS system for mobile applications
- Robust and compact design meeting specifications for mobile applications
- High Electromagnetic Compatibility (EMC)
- Inputs and outputs with fault detection
- Central output deactivation
- PWM solenoid currents for minimum hysteresis
- Closed-loop control of solenoid currents, i.e. not dependent on supply voltage and temperature
- Fused watchdog supervised processor for program run monitoring
- Hardware basec RAM memory supervision
- CPU internal Flash with ECC error-correcting code
- Three independent sensor power supplies
- Two-channel stop function (safety protection)
- Support up to 9 proportional joystick functions
- Joysticks supported:



- Double lock activation for critical functions
- Auto-null, Auto-Calibration, and Auto-Catch Test
- Easy to diagnose: Bootup system diagnosis, real time error detection and management
- Configurable CAN IOs for lights, or custom functions
- Dual-band, dual-mode station & softAP, WiFi 802.11/a/b/g/n, station & softAP, dual-band 2.4 & 5 GHz, hardware encryption engine for 128-bit AES, WAPI support
- Bluetooth v3.0+HS
- GNSS receiver support all four global navigation systems, GPS, GLONASS, GALILEO, BEIDOU
- Support for various infra-red temperature, liquid level, hydraulic pressure & temperature sensors
- IP67 junction block with stainless steel connectors and diagnostic LEDs
- Firmware upgradable with an USB stick or WiFi

Modular System

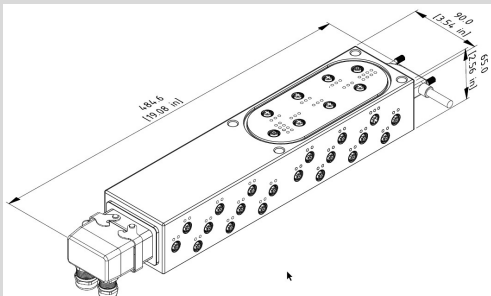


CS-Desktop Suite

- Support CS-550s, CS550/150s, CS-660s, CS-660/160s
- Parameter management, download/upload, configuration
- Log data management, activity reporting
- Error message management
- Joystick configuration
- Auto WiFi log data and parameter download
- Spreading activity GPS waypoint mapping

Technical Data CS-660/160 (for BODAS Controller RC 28-14/30 details refer to Rexroth data sheet RE 95 204)

General

Enclosure Material		Extruded aluminum, powder coated	
Weight		3.0 kg	6.6 lb. mass
Size	Display	252.5 mm high x 184 wide x 60.4 deep	
	Junction block	484.6 mm length x 90 wide x 65 high	19.08 in length x 3.54 wide x 2.56 high
			

Mechanical Mounting	“Ram Bracket”, size 1-1/2”
Display Screen	7” wide WVGA, 800 x 480 pixels, 16.7M colours, capacitive touch screen, 6H hardness Adjustable backlight, brightness of 1350 cd/m ² , Strengthen glass with thickness of 1.1mm
Loudspeaker	1.5 Watt amplifier with adjustable voice feedback

Electrical & Environmental Specifications

Supply Voltage	9-32 VDC	
Outputs	Proportional outputs	28 channels, current compensated
	Digital Outputs	14 channels
Inputs (All inputs protected and filtered)	Frequency Inputs	5 channels
	Switch Inputs	8 channels
	Analogue Inputs	7 channels
Interfaces	2 CAN ports, 2 serial ports	
GPS Tracking (when supplied)	High resolution industrial GNSS receiver support all four navigation systems, GPS, GLONASS, BEIDOU, GALILEO, and accept up to 72 satellites simultaneously	
WiFi Data Transfer (when supplied)	802.11 a/b/g/n, station & softAP, dual-band 2.4&5 GHz, hardware encryption engine for 128bit AES, WAPI support	
Operating Temperature	-30°C to 75°C	-22°F to 185°F
Storage Temperature	-40°C to 85°C	-40°F to 185°F

Compliant Standards (CS-660/160 and RC Controllers)

Electromagnetic Compatibility	100v/m, load dump	
Immunity	RF Immunity:	ISO 11452-2, 400-1000 MHz, 80% mod.1kHz 1 GHz—2 GHz, 80% mod. 1 kHz 25v/m (Level 1 Severity)
	Conducted Immunity:	ISO 7637-2 (2004), System Pulse 1, 2a, 2b, 3b, 4
RF Emissions	CISPR 25:2002-08, 30 MHz—1 GHz, according to 72/245/EC EN 55025	
Electrostatic Discharge	EN 61000-4-2 ISO 10605, Contact +/- 8kV, air discharge +/- 15kV	
Vibration	ISO 16750-3, 10-2000Hz @ 58 m/s	
Shock	IEC 60068-2-72, 40G for 11 ms	
Moisture	DIN EN 60068-2-30Db; version 2, part 2, Hum=95% 25 to -55°C	
Salt Spray	DIN 50021-SS, 72h 35°C 5% NaCl	
Medial Resistance	ISO 16750-5, cola, coffee, paint thinner	
Enclosure Protection	IEC 60529 IP56	